

New innovation with
New energy-saving lighting control.





PASSIVE INFRARED SENSOR

Lighting controls intended to conserve energy.


The sensor detects movement and ambient brightness, and automatically turns the lights On or Off. You no longer need to worry about forgetting to turn the lights off.

FULL-COLOR
WIDE
SERIES

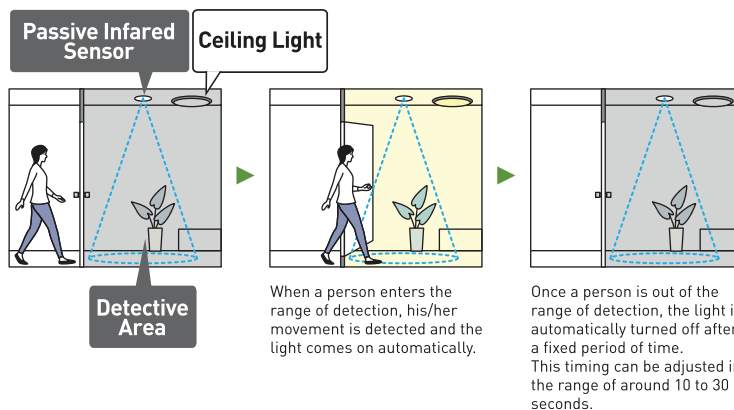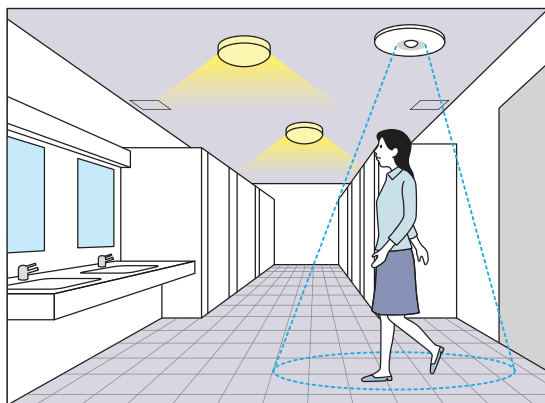

The detection area can be increased by connecting the maximum of 4 Auxiliary units with Master unit.

Applicable location
Dividing area (restroom, locker) and corridor.

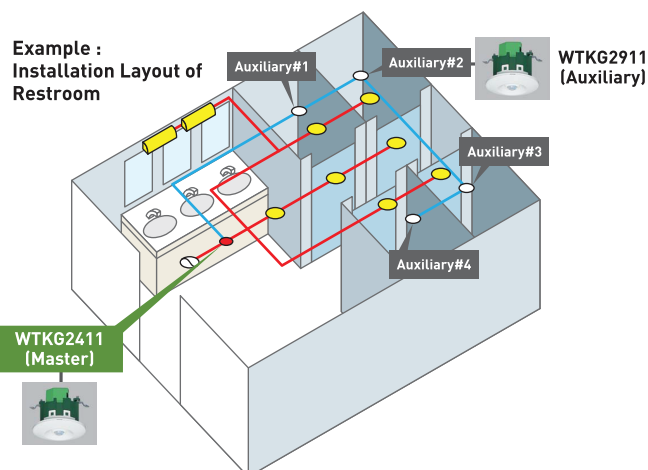

Sensor Switch

WMSU711K
White

Coming Soon



Rating	220V-240V Incandescent lamp 300W Flourescent lamp 100W
Time-Out Delay	45 seconds - 75 seconds
Daylight Sensor	Less than 15 lux
Installation	1.2 m-1.6 m high

Ceiling Mounted Sensor - Master

WTKG2411
White



Rating	3A 220-240V~, Incandescent Lamp 660W Fluorescent Lamp 330W
Applicable Standard	IEC60669-2-1
Ambient Temperature	-10°C — +40°C
Applicable Wire	Rigid Copper Conductor 1.5mm ² - 2.5mm ²
Size of Installation Hole(cm)	Ø7cm (+0.5cm)
Applicable Box	Square Box (Depth : 2 inches or more) Octagon Box (Depth : 2 inches or more)
Time-Out Delay	10 seconds - 30 minutes
Detectable Movement Speed	0.3m/seconds - 1.0m/seconds
Temperature of Detection	4°C or more

Ceiling Mounted Sensor - Auxiliary

WTKG2911
White



Rating	12V DC (Must be connect with only WTKG2411) can not connect with lamp
Applicable Standard	IEC60669-2-1
Ambient Temperature	-10°C — +40°C
Applicable Wire	Rigid Copper Conductor 1.5mm ² - 2.5mm ²
Size of Installation Hole(cm)	Ø7cm (+0.5cm)
Applicable Box	Square Box (Depth : 2 inches or more) Octagon Box (Depth : 2 inches or more)
Time-Out Delay	Depend on time out delay of master
Detectable Movement Speed	0.3m/seconds - 1.0m/seconds
Temperature of Detection	4°C or more

Ceiling Mounted Sensor

WTKG2310-P
White



Rating	3A 220V-240V~
Applicable Standard	IEC60669-2-1
Ambient Temperature	-10°C — +40°C
Applicable Wire	Rigid Copper Conductor 1.5mm ² - 2.5mm ²
Size of Installation Hole(cm)	Ø7cm (+0.5cm)
Applicable Box	Square Box (Depth : 2 inches or more) Octagon Box (Depth : 2 inches or more)
Time-Out Delay	Fixed 1 minute
Detectable Movement Speed	0.3m/seconds - 1.0m/seconds
Light Sensor	None
Temperature of Detection	4°C or more